

# ZYX®













ELEVATE YOUR DIFFERENCE

## CANVAS

Colors, finishes and sizes

Paleta de colores, acabados y tamaños

## PORCELAIN MATT. PORCELÁNICO MATE

CANVAS	BONE RED	TAUPE RED	BONE BLUE	TAUPE BLUE	BONE GREEN	TAUPE GREEN
 <p>15 cm. / 5,91" 15 cm. / 5,91"</p>	 225306 / ZM 226	 225303 / ZM 226	 225305 / ZM 226	 225302 / ZM 226	 225307 / ZM 226	 225304 / ZM 226
 <p>20 cm. / 7,87" 23 cm. / 9,06"</p>	 225312 / ZM 228	 225309 / ZM 228	 225311 / ZM 228	 225308 / ZM 228	 225313 / ZM 228	 225310 / ZM 228

## MATTER. PACKING LIST.

	PIECES BOX	KG BOX	S.Q.M. BOX	BOX EURO PALLET	KG EURO PALLET	S.Q.M EURO PALLET
<b>15X15 / 5,91"X5,91"</b>	25	10,8	0,56	125	1350	70
<b>20X23 / 7,87"X9,06"</b>	10	6,7	0,35	128	857,6	44,8

# CANVAS

15 x 15 cm. / 5,91"x5,91"

30 models created with graphs diversity available.  
30 gráficas diferentes disponibles.

Random.



Strong variation  
Variación alta

VARIACIÓN CROMÁTICA Y GRÁFICA /  
CHROMATIC AND GRAPHIC VARIATION

V1 Uniforme  
Uniform

V2 Variación leve  
Slight variation

V3 Variación media  
Moderate variation

V4 Variación alta  
Strong variation

CANVAS.

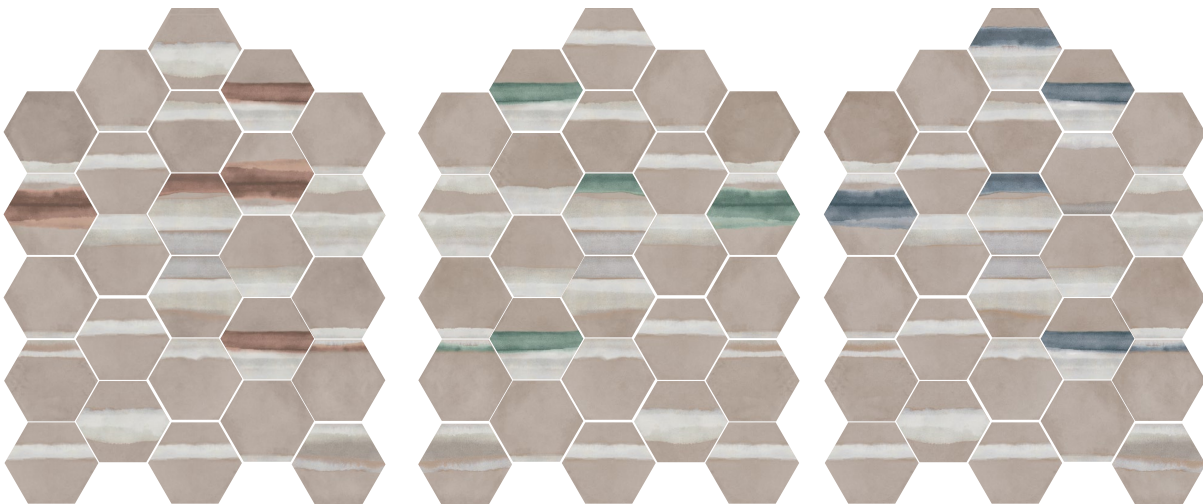
20 x 23 cm. / 7,87" x 9,05"

26 models created with graphs diversity available.

26 gráficas diferentes disponibles.

Random.

---



Strong variation  
Variación alta

VARIACIÓN CROMÁTICA Y GRÁFICA /  
CHROMATIC AND GRAPHIC VARIATION

V1 Uniforme  
Uniform

V2 Variación leve  
Slight variation

V3 Variación media  
Moderate variation

V4 Variación alta  
Strong variation

## TECHNICAL FEATURES CARACTERÍSTICAS TÉCNICAS

### CANVAS

15 x 15 cm. / 20 x 23 cm.

	Test standard Norma de ensayo	Value required by UNE-EN-14411 Valores prescritos norma UNE-EN-14411	Average value Valor medio
Dry-pressed ceramic tiles Group BIII ( $E_b \leq 0.5\%$ ) Baldosas cerámicas prensadas en seco Grupo BIIa ( $E_b \leq 0.5\%$ )			
Dimensional features Características dimensionales	UNE-EN-ISO-10545-2		Comply the norm Cumple la norma
Water absorption Absorción de agua	UNE-EN-ISO-10545-3	$\leq 0.5\%$	Comply the norm Cumple la norma
Bending strength / Resistencia a la flexión Modulus of rupture / Módulo de rotura Breaking strength / Fuerza de rotura	UNE-EN-ISO-10545-4	$\geq 35$ N/mm <sup>2</sup> $\geq 1300$ N	Comply the norm Cumple la norma
Linear thermal expansion Dilatación térmica lineal	UNE-EN-ISO-10545-8	Declared value Valor declarado	$< 9 \cdot 10^{-6}$ °C <sup>-1</sup>
Thermal shock resistance Resistencia al choque térmico	UNE-EN-ISO-10545-9	Required Exigida	Resist Resiste
Crazing resistance Resistencia al cuarteo	UNE-EN-ISO-10545-11	Required Exigida	Resist Resiste
Frost resistance Resistencia a la helada	UNE-EN-ISO-10545-12	Declared value Valor declarado	Resist Resiste
Chemical resistance / Resistencia química Domestic and swimming pool products / Productos de domésticos y sales para piscinas Acids of low concentration / Ácidos de baja concentración Alkalis of low concentration / Alcalis de baja concentración Acids of high concentration / Ácidos de alta concentración Alkalis of high concentration / Alcalis de alta concentración	UNE-EN-ISO-10545-13	Minimum class B Mínimo clase B  Declared value Valor declarado	GA  GLA GLA GHA GHA
Resistance to stains Resistencia a las manchas	UNE-EN-ISO-10545-14	Minimum class 3 Mínimo clase 3	5
Friction coefficient / Deslizamiento Pendulum / Péndulo Ramp (boots) / Rampa (botas) DCOF	UNE-ENV-12633 DIN 51130 ANSI A137.1	Declared value Valor declarado	Clase 2 Class 2 R9 >0.42
Resistance to the fire Resistencia al fuego	Decisión 96/603/CE modificada	Class A1-A1 <sub>FL</sub> Clase A1-A1 <sub>FL</sub>	Comply Cumple